

TRITON® II

SAND FILTER WITH CLEARPRO TECHNOLOGY®



THE #1 SAND FILTER IN THE WORLD IS NOW CAPABLE OF "POLISHING" POOL WATER LIKE NEVER BEFORE


Filtration engineers talk about "polishing" water. It means stripping all visible contaminants for sparkling clarity. In the past, sand filters were not capable of this performance, but they were legendary for their dependable service and low maintenance requirements.

Today, thanks to ClearPro Technology, the world's #1 sand filter can achieve "polished" water quality. Plus, the Triton II filter retains its position as the filter that requires the least attention from you.


The secret is a component inside the filter—a porous tube through which water must pass before it reenters the pool. It creates a final barrier to the small particles sand cannot stop, including the finest dust particles, algae and pollens. The result is dazzling water clarity—a level not attainable by any sand filter without ClearPro Technology.

At the same time, the Triton II filter remains blissfully simple, requiring less maintenance than either cartridge or Diatomaceous Earth (D.E.) filters. Just an occasional backwashing with the turn of a valve is all it takes to keep the Triton II filter delivering the clearest water year after year.

Traditional Sand Filter



Triton II Filter With ClearPro Technology

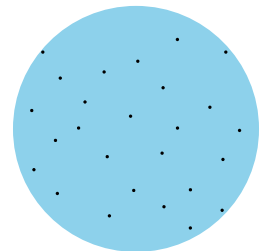

ILLUSTRATING THE DIFFERENCE

The graphics above illustrate, in a technically accurate way, the difference when ClearPro Technology is at work—far superior water clarity. The difference is particularly dramatic at night when pool lights can highlight particles in the water—not so when ClearPro Technology is on the job.


TRITON® II

SAND FILTER WITH CLEARPRO TECHNOLOGY®

Easy access, heavy-duty closure with built-in pressure relief valve makes inspection and maintenance fast and easier

Threaded bulkhead connectors for easier installation and service

One-piece, fiberglass-reinforced tank with UV-resistant surface finish for years of unequalled strength and durability

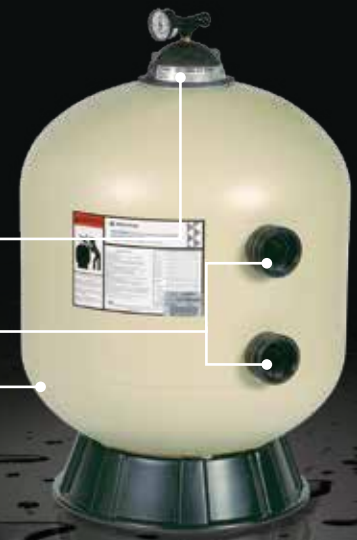

Model Number	Filter Area Sq. Ft.	Vertical Clearance*	Filter Diameter	Required Sand† (lbs)	Flow Rate GPM		Turnover Capacity—Res. (Gallons)		
					Res.**	Comm.	8 hrs.	10 hrs.	12 hrs.
TR 60 CP	3.14	37.5"	24"	325	63	63	30,240	37,800	45,360

* Required clearance to remove the closure.

† Use standard #20 silica sand.

** Maximum flow rate. Flow rate is based on 20 GPM per sq. ft. of filter area. Actual system flow will depend on plumbing size and other system components

KEEPING IT SIMPLE WHILE MAKING IT SPARKLE

Besides its superior filtration performance, the Triton II filter with ClearPro Technology delivers a level of dependability and ease of operation and maintenance for a track record that's unsurpassed. Every design detail has been refined to make the Triton II filter the industry standard.

ADDITIONAL FEATURES INCLUDE:

- Flow system design controls filtration quality and helps ensure maximum run times between backwashing to save you time.
- Combination sand-and-water drain speeds servicing and winterizing.
- All internal parts are threaded for ease of maintenance.
- Swing-away water diffuser allows instant access to sand and all internal parts.

AVAILABLE FROM:



1620 HAWKINS AVE, SANFORD, NC 27330 800.831.7133 WWW.PENTAIRPOOL.COM

All Pentair trademarks and logos are owned by Pentair or one of its global affiliates. Triton® and ClearPro Technology® are registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies in the United States and/or other countries. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

pumps • filters • heaters • heat pumps • automation • lighting • cleaners • sanitizers • water features • maintenance products

1/16 Part # P1-019 ©2016 Pentair Water Pool and Spa, Inc. All rights reserved.

